


HIGH PRESSURE HAND PUMP S525 Power Unit

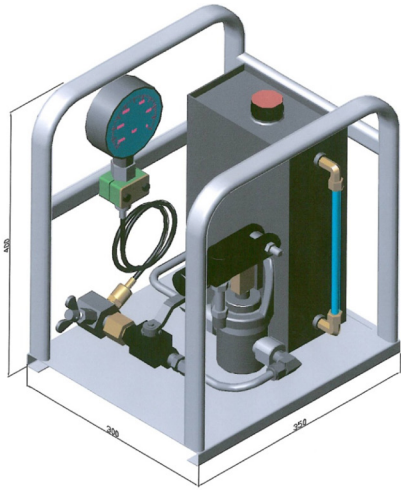

Technical data

- ▶ Dimensions: 350 x 300 x 400 mm
- ▶ Approx. weight: 15 kg
- ▶ Frame mount hand pump, fully equipped and ready for use
- ▶ Tank capacity: 5L
- ▶ Max. pressure: 1200 bar
- ▶ Available in 2 versions : **frame mount** (picture above) or **standalone pump**
- ▶ Other tank capacities on request

Principle

This single acting piston pump is adapted to hydraulic tests and other industrial applications that need little volumes at high pressures.

The parts of the pump in contact with the fluid are in stainless steel. The pump can consequently transport de-ionized water.

The tank mounted on the above picture is in stainless steel.

MODEL	Max. Outlet Pressure (bar)	Inlet Fitting (NPT)	Outlet Fitting (NPT)
S-525-35	150	3/8 NPT	3/8 NPT
S-525-60	200	3/8 NPT	3/8 NPT
S-525-100	300	3/8 NPT	3/8 NPT
S-525-125	370	1/4 NPT	9/16-18 NBS
S-525-150	460	1/4 NPT	9/16-18 NBS
S-525-200	820	1/4 NPT	9/16-18 NBS
S-525-300	1200	1/4 NPT	9/16-18 NBS